


Seat



TYPE G4

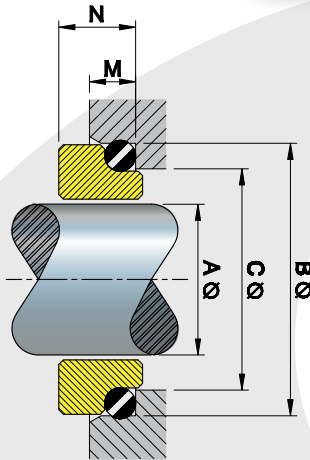


Dimensions (mm)

A	B	C	M	N
±0.05	±0.05	±0.05	±0.05	±0.12
10	19.2	15.5	5.0	6.6
12	21.6	17.5	5.0	5.6
14	24.6	20.5	5.0	5.6
16	28.0	22.0	6.5	7.5
18	30.0	24.0	6.5	8.0
20	35.0	29.5	6.5	7.5
22	35.0	29.5	6.5	7.5
24	38.0	32.0	6.5	7.5
25	38.0	32.0	6.5	7.5
28	42.0	36.0	6.5	9.0
30	45.0	39.2	6.5	10.5
32	48.0	42.2	6.5	10.5
35	52.0	46.2	6.5	11.0
38	55.0	49.2	6.5	10.3
40	58.0	52.2	6.5	10.8
42	62.0	53.3	8.0	12.0
45	64.0	55.3	8.0	11.6
48	68.4	59.7	8.0	11.6
50	69.3	60.8	8.0	11.6
55	75.4	66.5	8.0	13.3
58	78.4	69.5	8.0	13.3
60	80.4	71.5	8.0	13.3
65	85.4	76.5	8.0	13.0
68	91.5	82.7	8.0	13.7
70	92.0	83.0	8.0	13.0
75	99.0	90.2	8.0	14.0
80	104.0	95.2	8.0	15.0

Materials

-  Bellow > NBR (Nitrile®), FKM (Viton®)
E.P.R (EPDM).
-  Seat > Stainless Steel 304, Graphite Carbide,
Sintered Silicon Carbide.

TEMPERATURE LIMITS

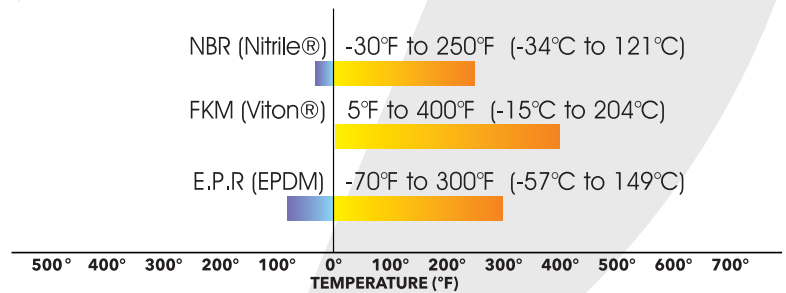

For any variation regarding what is described in this technical specification, please send an email to sales@vazel.com