


LINE

A

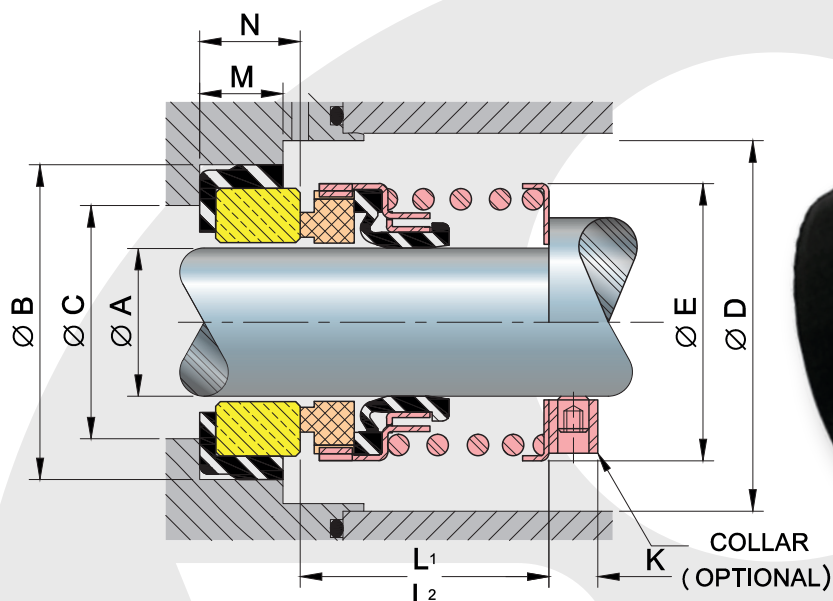

Dimensions within the ASTM standard (except column "C")
Information in column "C" depends on the manufacturer of the pump.

Dimensions (Inches)

A	B	C	D	E	L ₁	L ₂	K	M	N
±0.002	±0.002	REF.	MIN.	MAX.	±0.020	±0.020	±0.005	±0.005	±0.015
3/8	0.875	0.625	1.062	0.937	1.188	0.812	0.312	0.250	0.312
1/2	1.000	0.750	1.187	1.062	1.188	0.812	0.312	0.250	0.312
5/8	1.250	0.937	1.343	1.218	1.312	0.875	0.312	0.344	0.406
3/4	1.375	1.062	1.468	1.343	1.312	0.875	0.375	0.344	0.406
7/8	1.500	1.187	1.656	1.531	1.375	0.937	0.375	0.344	0.406
1	1.625	1.312	1.750	1.625	1.562	1.000	0.375	0.375	0.438
1-1/8	1.750	1.437	1.870	1.745	1.625	1.062	0.375	0.375	0.438
1-1/4	1.875	1.562	2.000	1.875	1.625	1.062	0.375	0.375	0.438
1-3/8	2.000	1.687	2.125	2.000	1.687	1.125	0.375	0.375	0.438
1-1/2	2.125	1.812	2.250	2.125	1.687	1.125	0.375	0.375	0.438
1-5/8	2.375	2.000	2.500	2.375	2.000	1.375	0.375	0.438	0.500
1-3/4	2.500	2.125	2.625	2.500	2.000	1.375	0.375	0.438	0.500
1-7/8	2.625	2.250	2.750	2.625	2.125	1.500	0.375	0.438	0.500
2	2.750	2.375	2.937	2.812	2.125	1.500	0.375	0.438	0.500
2-1/8	3.000	2.500	3.125	3.000	2.375	1.687	0.500	0.500	0.562
2-1/4	3.125	2.625	3.250	3.125	2.375	1.687	0.500	0.500	0.562
2-3/8	3.250	2.750	3.375	3.250	2.500	1.812	0.500	0.500	0.562
2-1/2	3.375	2.875	3.500	3.375	2.500	1.812	0.500	0.500	0.562
2-5/8	3.375	3.000	3.750	3.625	2.750	1.937	0.500	0.562	0.625
2-3/4	3.500	3.125	3.875	3.750	2.750	1.937	0.500	0.562	0.625
2-7/8	3.750	3.250	4.000	3.875	2.875	2.062	0.500	0.562	0.625
3	3.875	3.375	4.187	4.062	2.875	2.062	0.500	0.562	0.625

Materials

- Metallic Parts > Stainless Steel 304.
- Spring > Stainless Steel 304.
- Rotary Face > Phenolic Carbon, Graphite Carbide, Sintered Silicon Carbide.
- Bellows > NBR (Nitrile®), FKM (Viton®), CR (Neoprene®), E.P.R (EPDM).
- Seat > Ceramic, Sintered Silicon Carbide, Tungsten Carbide, Stainless Steel, Ni-Resist.

Operation limits

Velocity	Max. 3,600 R.P.M*
Pressure	125 PSI (8.8Kg/cm ²)**
Temperature limits	-57 °C a 204 °C***

*Depends on the diameter of the shaft.

**It depends on the combination of material of the faces.

***Depends on the material of the elastomer.

Applications:

The VAZEL Line "A" mechanical seal is used in industrial pumps, rotating turbines, centrifuges or agitators. It works with hydraulic fluids and aqueous solutions, depending on the combination of materials.

For any variation regarding what is described in this technical specification, please send an email to sales@vazel.com